

Product Description

TradeMark Stud Adhesive was formulated to adhere plasterboard and fibre cement wallboard to timber or metal frames with superior quality, ease of application and less wastage. It is compliant with AS/NZ2573 standards and European REACH safety regulations.

Suitable Substrates

Plasterboard
Drywall
Fibre Cement
Plaster Decals

Non Suitable Substrates

Some Treated Timber
Wet or Green Timber
Pre-painted Steel

Directions For Use

Ensure all substrates are free from dust, oil and/or other contaminants. Substrates must be bonded within 30 minutes of adhesive application. TradeMark Stud Adhesive is intended only for use on plasterboard, timber or metal frames and fibre cement.

Wall Installation Guide

Apply walnut sized daubs of TradeMark Stud Adhesive at a min. of 200mm centres and a max. of 400mm centres from nail fixings. DO NOT place adhesive on top of OR immediately next to nail fixings.



Apply adhesive according to the 1/3 spacing system or conventional spacing system to guarantee bond longevity. Place plasterboard on wall within 30 minutes of adhesive application.

Full strength will be reached in 24-48 hours.

Ceiling Installation Guide

Apply walnut sized daubs of TradeMark Stud Adhesive at a min. of 200mm centres and a max. of 230mm centres from nail fixings or plasterboard sheet edges. DO NOT place adhesive on top of OR immediately next to nail fixings. Apply adhesive according to the 1/3 spacing system or conventional spacing system to guarantee bond longevity. Place plasterboard on ceiling within 30 minutes of adhesive application. Refer to plasterboard manufacturer's instruction for details on how to achieve desired ceiling aesthetics.

Full strength will be reached in 24-48 hours. In slow drying conditions, ensure a temporary block is installed for at least 48 hours.

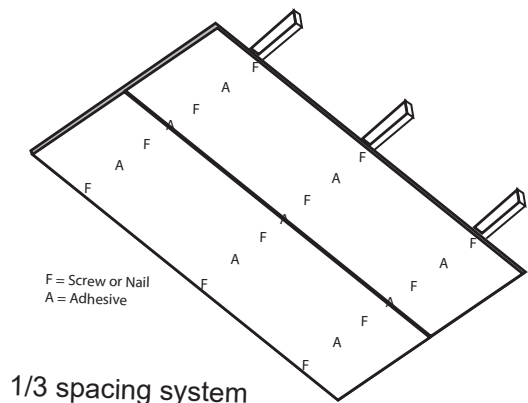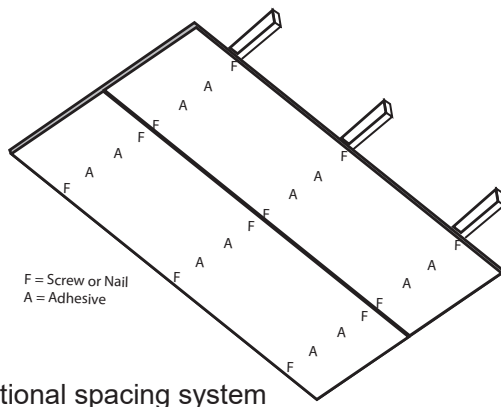



Technical Data Sheet

Chemical Technical Data

Skinning Time:	1-2 minutes
Cure time:	24-48 hours*
Appearance:	Cream
Boiling Point @760mmHg:	>100°C
Odour:	Slight
PH:	6-7
Solubility in Water:	Yes, when wet
Specific Gravity:	1.03 gr/cm ³
%VOC:	0
Viscosity(Brookfield L7/1,5 25 oC):	1,000,000 CPS

*cure times may vary depending on climate.

Storage

Store between 5 - 28°C out of direct sunlight with lid secured tightly. Please ensure product is used within shelf life of 18 months.

Health & Safety

TradeMark Stud Adhesive is not considered to be a hazardous substance according to SafeWork Australia classification criteria. Refer to MSDS for safety information.

Disposal

Empty TradeMark Stud Adhesive containers are recyclable. Please remove adhesive residue before recycling empty containers.

Clean up

Clean up with water and rags before drying occurs. Remove cured product with a knife or scraper.



DISCLAIMER OF WARRANTY: The technical data contained herein is based on our present knowledge and experience and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings that result from technological changes or research between the date of issue of this document and the date the product is acquired. Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product. Our guarantee applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions. The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.